



# MG Operator with Lock Interlock 460VAC 3 Phase Right Hand For 1/3HP and 1/2HP

EN 405 R

- NOTES:
- R1-BRAKE RELAY (COIL 24VAC)
  - R2-BRAKE RELAY (COIL 24VAC)
  - R3-INTERLOCK RELAY (COIL 24VAC)
  - LSA-LS1 & LS3 MICROSWITCH CONNECTOR
  - LSB-LS2 & LS4 MICROSWITCH CONNECTOR
  - LSC-OPEN CONTROL CONNECTOR
  - LSD-CLOSE CONTROL CONNECTOR
  - LS5-INTERNAL INTERLOCK MICROSWITCH
  - LSA1-MANUAL CUT-OFF MICROSWITCH
  - LSB1-INTERNAL INTERLOCK MICROSWITCH



- TERMINAL NUMBER:
- CONTROL STATION-STOP
  - CONTROL STATION-OPEN
  - CONTROL STATION-CLOSE
  - CONTROL STATION-COMMON
  - 4&4A JUMP FOR MOMENTARY CONTACT CLOSE
  - 5&6 SENSING-EDGE (S.E.) CONNECTION
  - 7&8 DOOR CLOSING WARNING SIGNAL 24VAC
  - 9&10 EXTERNAL INTERLOCK

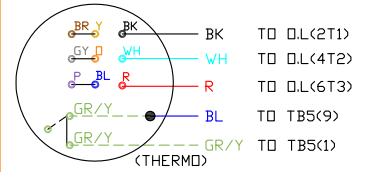

460V 3 PHASE  
MOTOR CONNECTION

